

DVLXB55SP90N

Double-Sided Barrier-Screen Direct-Vent Fireplace




FEATURES & BENEFITS

- Combustible material can be brought right up to the opening
- No special framing requirements
- Included dual blower heat distribution
- Power vented for installation flexibility
- Remote control programmable LED under-lighting
- Multi-function remote control with variable flame height adjustment
- Fine mesh barrier screen

SPECIFICATIONS

- Up to 45,000 BTUs (Nat)
- 53 1/2 x 24-inch ceramic glass viewing area
- 4 x 6-inch DuraVent
- Requires power vent

DVLXB55SP90N

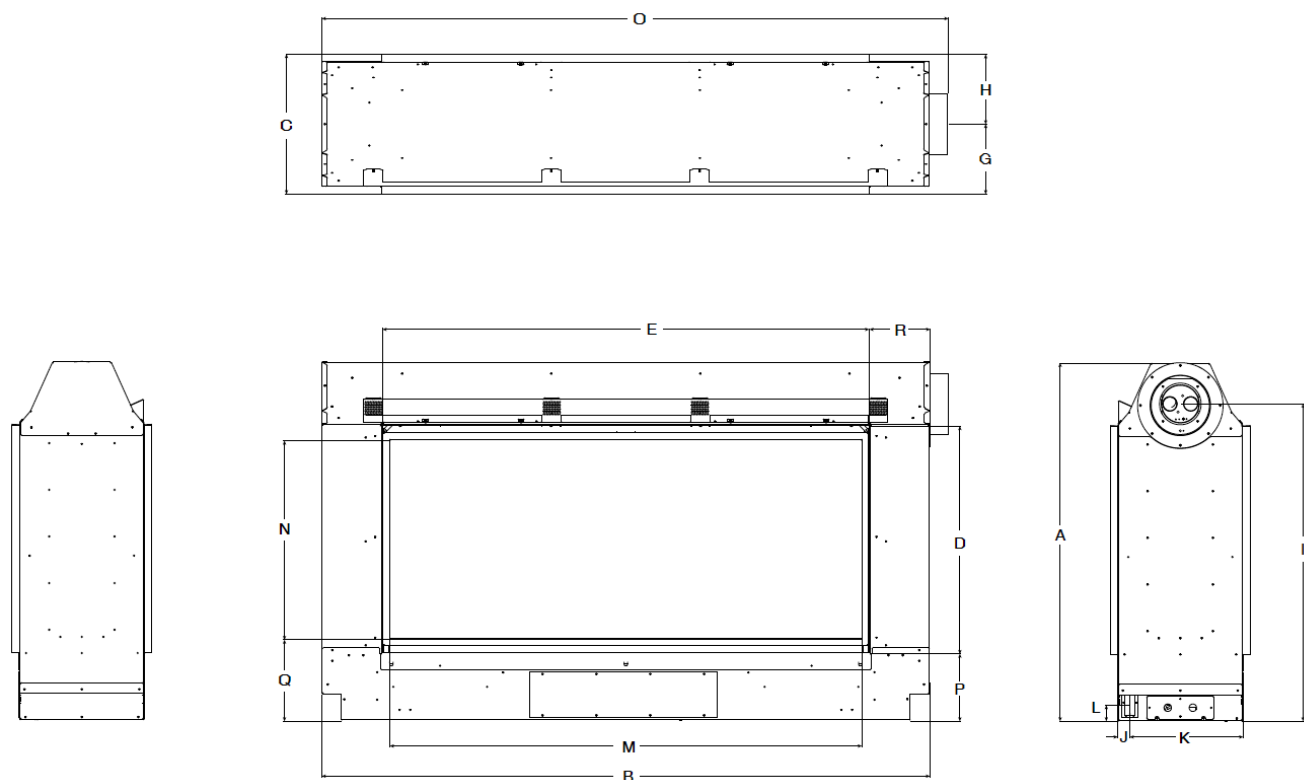

| Dimensions (in inches) | | | |
|------------------------|----------|---|----------|
| A | 39 1/4 | J | 1 11/32 |
| B | 66 5/8 | K | 12 13/32 |
| C | 15 5/16 | L | 1 3/4 |
| D | 24 15/16 | M | 51 23/32 |
| E | 53 5/16 | N | 21 13/16 |
| F | 10 23/32 | O | 68 21/32 |
| G | 7 21/32 | P | 7 3/8 |
| H | 7 21/32 | Q | 8 29/32 |
| I | 34 25/32 | R | 6 21/32 |

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes – wood grain and color will vary. Adjust light levels and use “natural light” incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:



A Division of
Empire Comfort Systems Inc.
918 Freeburg Ave.
Belleville, IL 62220-2623
info@empirecomfort.com

8/20

The Plaza name and logo is a registered U.S. trademark.